



INBETWEEN

FLAMSKYDD:	SS-EN 1101
BREDD:	150 cm
MATERIAL:	100 % polyester (flamsäker)
VIKT:	715 g/m ²
KRYMPNING:	2 %
FÄRGHÄRDIGHET:	
mot ljus enligt	
SS-EN ISO 105-B02	5-7 (Skala 1-8)
mot tvätt enligt	
SS-EN ISO 105-C06	4-5 (Skala 1-5)

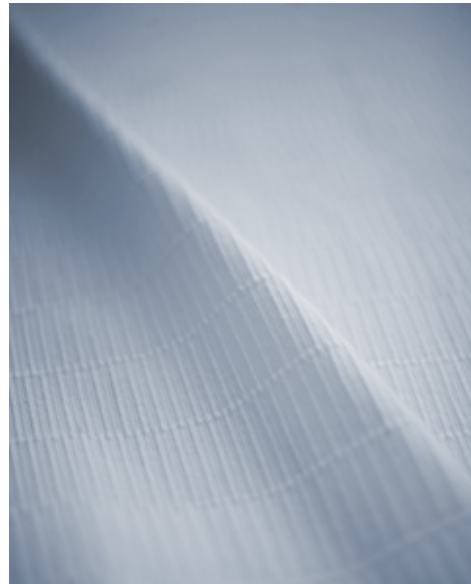

LJUDABSORBERING

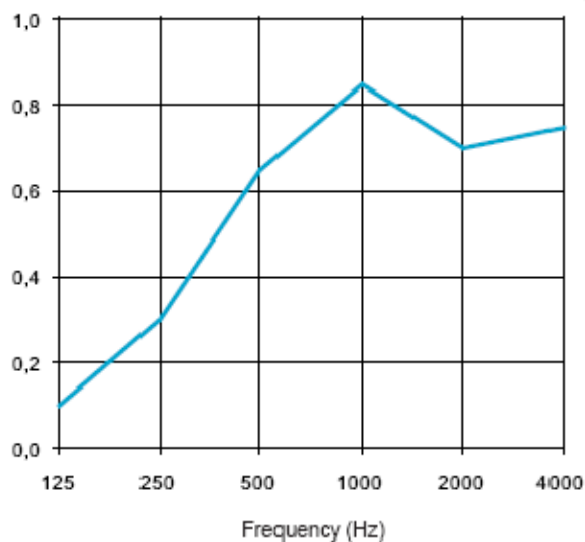

Frequency, Hz	Practical absorption factor, α_p
125	0,10
250	0,30
500	0,65
1000	0,85
2000	0,70
4000	0,75

ABSORPTION CLASS: C
 α_v 0,6 (M,H)*
 FLOW RESISTANCE: 67 Pa x s/m

* (M,H) indicates good absorption in the medium and high frequency range

— 100 mm from wall

SKÖTSELANVISNING:

