


## STILL

<b>FLAMSKYDD:</b>	SS-EN 1101
<b>BREDD:</b>	150 cm
<b>MATERIAL:</b>	100 % polyester (flamsäker)
<b>VIKT:</b>	580 g/m <sup>2</sup>
<b>KRYMPNING:</b>	2 %
<b>FÄRGHÄRDIGHET:</b>	mot ljus enligt
SS-EN ISO 105-B02	5-7 (Skala 1-8)
mot tvätt enligt	
SS-EN ISO 105-C06	4-5 (Skala 1-5)



### LJUDABSORBERING

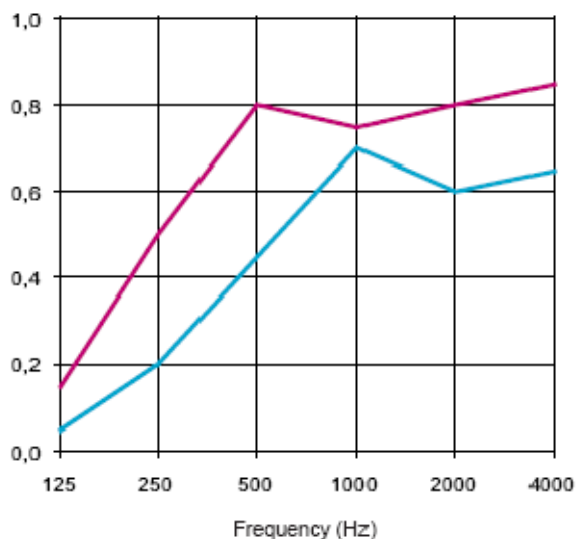

Frequency, Hz	Practical absorption factor, $\alpha_p$	
	125	0,05
250	0,20	0,50
500	0,45	0,80
1000	0,70	0,75
2000	0,60	0,80
4000	0,65	0,85

ABSORPTION CLASS: D C  
 $\alpha_w$ : 0,45 (M,H)\* 0,75  
 FLOW RESISTANCE: 36 Pa x s/m

\* (M,H) indicates good absorption in the medium and high frequency range

### SKÖTSELANVISNING:

